

Product data sheet

Specifications



Miniature plug in relay, Harmony, 6A, 4CO, with LED, lockable test button, 230V AC

RXM4AB2P7

Main

| | |
|-------------------------------|----------------------------------|
| Range of product | Harmony Electromechanical Relays |
| Series name | Miniature |
| Product or component type | Plug-in relay |
| Device short name | RXM |
| Contacts type and composition | 4 C/O |
| [Uc] control circuit voltage | 230 V AC 50/60 Hz |
| Status LED | With |
| Control type | Lockable test button |
| Utilisation coefficient | 20 % |

Complementary

| | |
|--|---|
| Shape of pin | Flat |
| [Ui] rated insulation voltage | 250 V conforming to IEC 300 V conforming to CSA 300 V conforming to UL |
| [Uimp] rated impulse withstand voltage | 2.5 kV during 1.2/50 μ s |
| Contacts material | AgNi |
| [Ie] rated operational current | 3 A at 28 V (DC) NC conforming to IEC 3 A at 250 V (AC) NC conforming to IEC 6 A at 28 V (DC) NO conforming to IEC 6 A at 250 V (AC) NO conforming to IEC 6 A at 277 V (AC) conforming to UL 8 A at 30 V (DC) conforming to UL |
| Continuous output current | 5 A |
| Maximum switching voltage | 250 V conforming to IEC |
| Resistive rated load | 6 A at 250 V AC 6 A at 28 V DC |
| Maximum switching capacity | 1500 VA/168 W |
| Minimum switching capacity | 170 mW at 10 mA, 17 V |
| Operating rate | \leq 1200 cycles/hour under load \leq 18000 cycles/hour no-load |
| Mechanical durability | 10000000 cycles |
| Electrical durability | 100000 cycles for resistive load |

| | |
|---|-----------------------------|
| Average coil consumption in VA | 1.2 at 60 Hz |
| Average consumption | 1.2 VA at 60 Hz |
| Drop-out voltage threshold | >= 0.15 U _c |
| Operate time | 20 ms |
| Release time | 20 ms |
| Average coil resistance | 15000 Ohm at 20 °C +/- 15 % |
| Rated operational voltage limits | 184...253 V AC |
| Safety reliability data | B10d = 100000 |
| Protection category | RT I |
| Test levels | Level A group mounting |
| Operating position | Any position |
| CAD overall height | 82.8 mm |
| CAD overall depth | 80.35 mm |
| Net weight | 0.037 kg |
| Device presentation | Complete product |

Environment

| | |
|--|--|
| Dielectric strength | 1300 V AC between contacts with micro disconnection 2000 V AC between coil and contact with basic insulation 2000 V AC between poles with basic insulation |
| Product certifications | CE CSA GOST UL Lloyd's |
| Standards | CSA C22.2 No 14 EN/IEC 61810-1 UL 508 |
| Ambient air temperature for storage | -40...85 °C |
| Ambient air temperature for operation | -40...55 °C |
| Vibration resistance | 3 gn, amplitude = +/- 1 mm (f = 10...150 Hz)5 cycles in operation 5 gn, amplitude = +/- 1 mm (f = 10...150 Hz)5 cycles not operating |
| IP degree of protection | IP40 conforming to EN/IEC 60529 |
| Shock resistance | 10 gn for in operation 30 gn for not operating |
| Pollution degree | 2 |

Packing Units

| | |
|-------------------------------------|---------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 2.0 cm |
| Package 1 Width | 2.8 cm |
| Package 1 Length | 4.8 cm |
| Package 1 Weight | 35.0 g |
| Unit Type of Package 2 | BB1 |
| Number of Units in Package 2 | 10 |
| Package 2 Height | 3.0 cm |
| Package 2 Width | 10.3 cm |

| | |
|------------------------------|----------|
| Package 2 Length | 12.5 cm |
| Package 2 Weight | 392.0 g |
| Unit Type of Package 3 | S02 |
| Number of Units in Package 3 | 240 |
| Package 3 Height | 15.0 cm |
| Package 3 Width | 30.0 cm |
| Package 3 Length | 40.0 cm |
| Package 3 Weight | 9.942 kg |


Offer Sustainability

| | |
|----------------------------|--|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS declaration |
| RoHS exemption information | Yes |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End of Life Information |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |


Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|



Dimensions

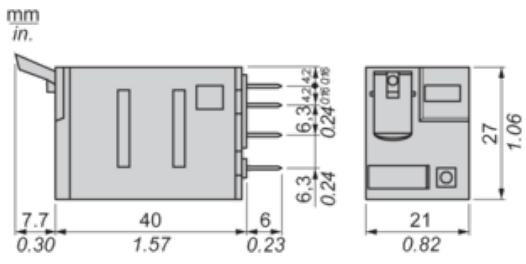

Pin Side View

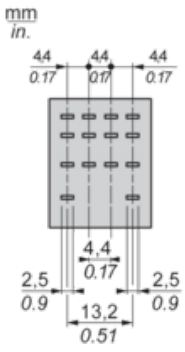

Wiring Diagram



Symbols shown in blue correspond to Nema marking.

Electrical Durability of Contacts

Durability (inductive load) = durability (resistive load) x reduction coefficient.

Resistive AC load



X Switching capacity (kVA)

Y Durability (Number of operating cycles)


A RXM2AB...

B RXM3AB...

C RXM4AB...


D RXM4GB...

Reduction coefficient for inductive AC load (depending on power factor $\cos \phi$)

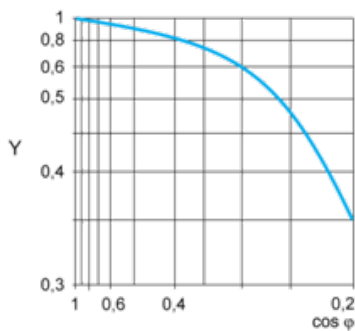

Y Reduction coefficient (A)

Maximum switching capacity on resistive DC load

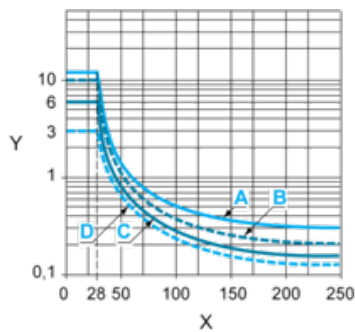

X Voltage DC

Y Current DC

A RXM2AB...


B RXM3AB...

C RXM4AB...

D RXM4GB...

Note : These are typical curves, actual durability depends on load, environment, duty cycle, etc.

AC Coil Voltage and Operating Temperature under continuous duty

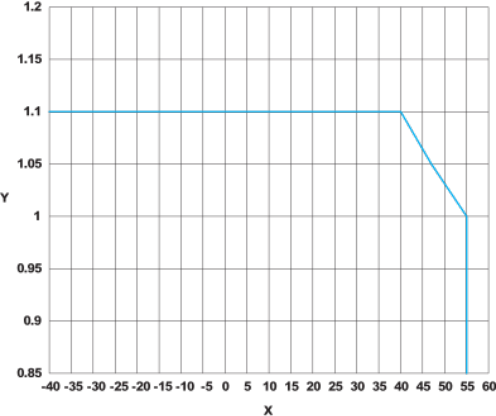

X : Operating temperature (°C)

Y : AC coil voltage (UC)

Recommended replacement(s)